

## Test Specifications and Results of ADC components

### Spec-00000058. pdf

$$v_i = (a_i \times \text{ADC\_vdd}) / 2^{\text{ADC\_bit}}$$

$$y = (v_i - x\_offset) / \text{gain} + y\_offset \quad \text{range min to max}$$

$$\text{SMA calculation method} \quad \text{phy} = (y_n + y_{n-1} + y_{n-2}) / n$$

$$\text{EMA calculation method} \quad \text{phy} = (y \times k) + (\text{phy}_{n-1} \times (1 - k))$$

$$\text{WMA calculation method} \quad \text{phy} = (y_n \times n) + (y_{n-1} \times (n-1)) + \dots + (y_1 \times 1) / (n + (n-1) + \dots + 1)$$


$$\text{Non-MA calculation method} \quad \text{phy} = y$$

Date	4-Nov-22
Verifier	Red Dragon


### Spec-LM35C\_LM35CA. pdf

#### component data

x_offset	0.0000 [V]
gain	0.01 [V/°C]
y_offset	0.0 [°C]
max	110.0 [°C]
min	2.0 [°C]

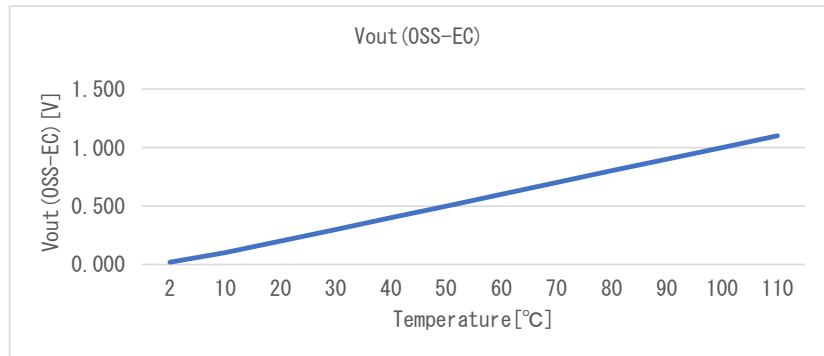

Coefficient		
SMA	n	4
EMA	k	0.75
WMA	m	3

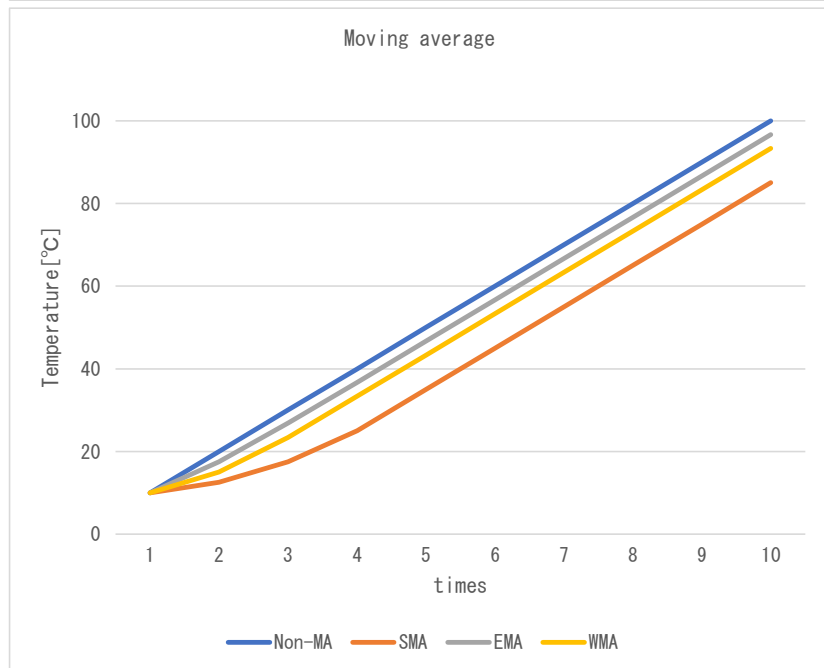


### Test environment

Board	NUCLEO-F401RE
MPU	STM32F401RE
CompilerVer	Arm Compiler 6.16
IDE	Mbed Studio 1.4.4
Vdd	3.3 [V]
ADC bit	16 [bit]
ADC pin	A0 -
Component	Dummy

### Normal operating voltage


Vdd	5.0 [V]
-----	---------

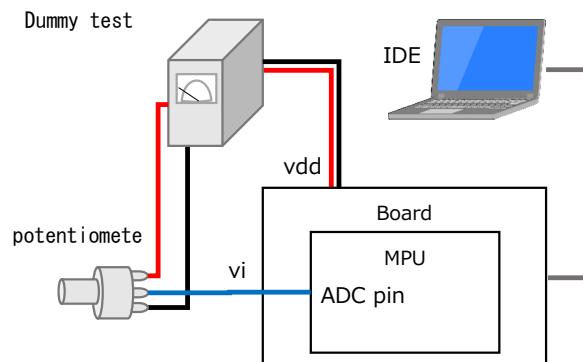

**Test Method**

1. Coupling test with variable resistors

As shown in the figure below, the voltage is varied by a variable resistor to check if the temperature calculation results match the specifications. Non-MA mode:

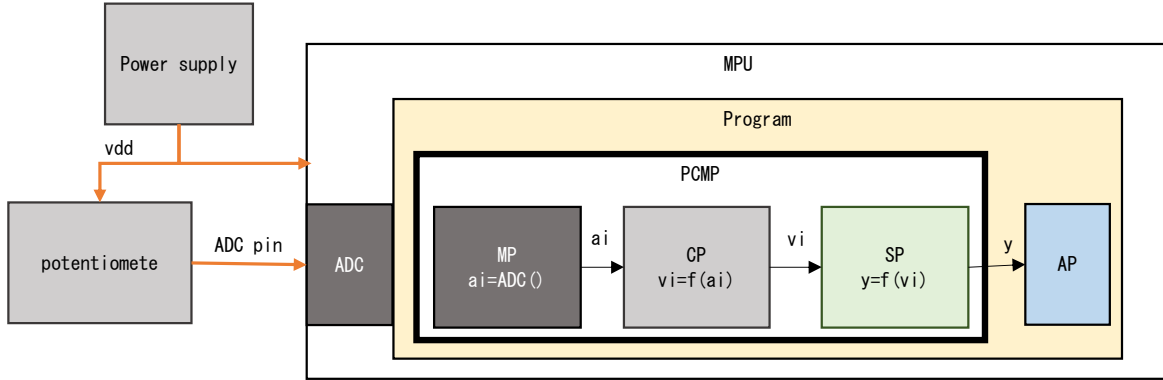

※Use a 3.3V board instead of a 5V board because we do not have a board with 5V Vdd, although it is a 5V product


Data with 3.3V board	
x_offset	0.0000 [V]
gain	0.01 [V/°C]
y_offset	0.0 [°C]

No.	ADC pin	ai	vi	p	res. phy	res. sts	Judgment
1	0.000	Expected	0	0.000	0.000	2.000	4,002
		Measured	32	0.002	0.161	2.000	4,002
		Difference	-32	-0.002	-0.161	0.000	0
2	1.300	Expected	25,817	1.300	129.999	110.000	4,001
		Measured	25,798	1.299	129.903	110.000	4,001
		Difference	19	0.001	0.096	0.000	0
3	1.500	Expected	29,789	1.500	150.000	110.000	4,001
		Measured	29,783	1.500	149.969	110.000	4,001
		Difference	6	0.000	0.030	0.000	0
4	3.300	Expected	65,536	3.300	330.000	110.000	4,001
		Measured	65,535	3.300	329.995	110.000	4,001
		Difference	1	0.000	0.005	0.000	0

res. sts    4,000    Normal  
               4,001    Max Limiter NG  
               4,002    Min Limiter NG

## 2. Detail of replacing ADC value test

As shown in the figure below, change the MP layer to the value read from the Dummy table as shown in the test, and perform the following detailed test.

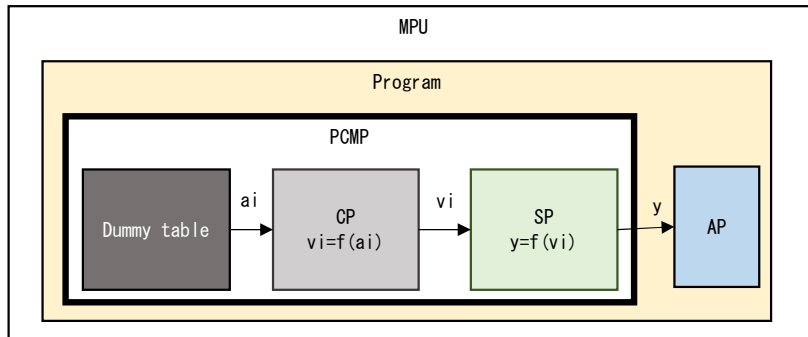

### 2-1. Max/Min range test

Vary  $a_i$  according to Dummy table as shown in the table below, and check Max/Min limiters and diagnostic results. Non-MA mode.

No.	Dummy $a_i$	$v_i$	p	res. phy	res. sts	Judgment
1	Expected	264	0.020	2.014	4,000	OK
	Measured	264	0.020	2.014	4,000	
	Difference	0	0.000	0.000	0	
2	Expected	263	0.020	2.007	4,000	OK
	Measured	263	0.020	2.007	4,000	
	Difference	0	0.000	0.000	0	
3	Expected	262	0.020	1.999	4,002	OK
	Measured	262	0.020	1.999	4,002	
	Difference	0	0.000	0.000	0	
4	Expected	263	0.020	2.007	4,000	OK
	Measured	263	0.020	2.007	4,000	
	Difference	0	0.000	0.000	0	
5	Expected	14,417	1.100	109.993	4,000	OK
	Measured	14,417	1.100	109.993	4,000	
	Difference	0	0.000	0.000	0	
6	Expected	14,418	1.100	110.001	4,001	OK
	Measured	14,418	1.100	110.006	4,001	
	Difference	0	0.000	-0.005	0	
7	Expected	14,417	1.100	109.993	4,000	OK
	Measured	14,417	1.100	109.993	4,000	
	Difference	0	0.000	0.000	0	


res. sts    4000    Normal  
               4001    Max Limiter NG  
               4002    Min Limiter NG

## 2-2. Moving average test

Check each Filter by changing  $a_i$  according to the Dummy table as shown in the table below.


### SMA

No.	Dummy $a_i$	$v_i$	$p$	res. phy	res. sts	Judgment	
1	Expected	1,310	0.100	9.995	9.995	4,000	OK
	Measured	1,310	0.100	9.995	9.995	4,000	
	Difference	0	0.000	0.000	0.000	0	
2	Expected	3,310	0.253	25.253	13.809	4,000	OK
	Measured	3,310	0.253	25.253	13.809	4,000	
	Difference	0	0.000	0.000	0.000	0	
3	Expected	5,310	0.405	40.512	21.439	4,000	OK
	Measured	5,310	0.405	40.512	21.439	4,000	
	Difference	0	0.000	0.000	0.000	0	
4	Expected	7,310	0.558	55.771	32.883	4,000	OK
	Measured	7,310	0.558	55.771	32.883	4,000	
	Difference	0	0.000	0.000	0.000	0	
5	Expected	9,310	0.710	71.030	48.141	4,000	OK
	Measured	9,310	0.710	71.030	48.141	4,000	
	Difference	0	0.000	0.000	0.000	0	
6	Expected	11,310	0.863	86.288	63.400	4,000	OK
	Measured	11,310	0.863	86.288	63.400	4,000	
	Difference	0	0.000	0.000	0.000	0	
7	Expected	13,310	1.015	101.547	78.659	4,000	OK
	Measured	13,310	1.015	101.547	78.659	4,000	
	Difference	0	0.000	0.000	0.000	0	

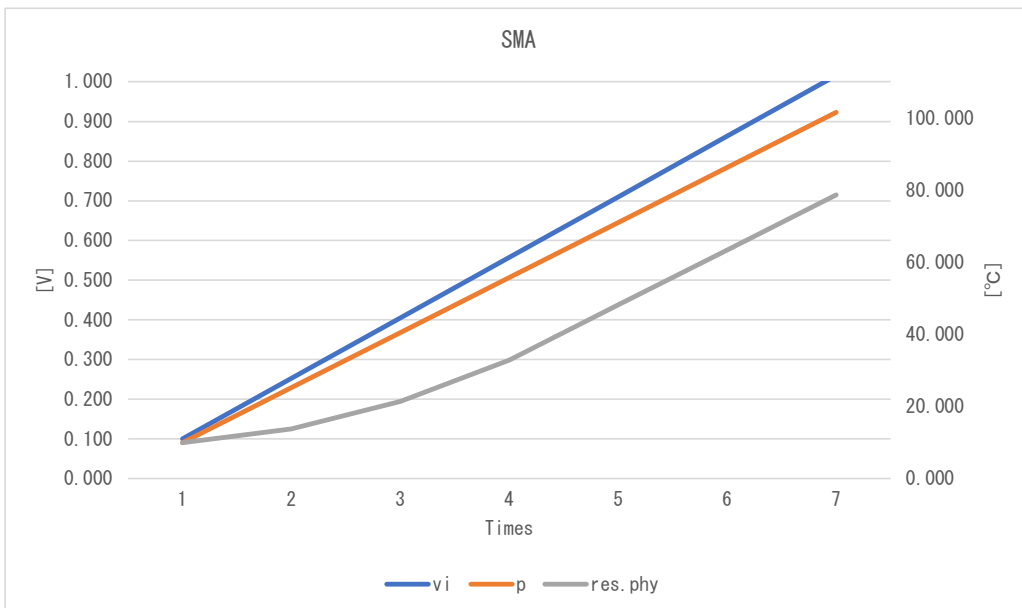

EMA

No.		Dummy ai	vi	p	res. phy	res. sts	Judgment
1	Expected	1,310	0.100	9.995	9.995	4,000	OK
	Measured	1,310	0.100	9.995	9.995	4,000	
	Difference	0	0.000	0.000	0.000	0	
2	Expected	3,310	0.253	25.253	21.439	4,000	OK
	Measured	3,310	0.253	25.253	21.439	4,000	
	Difference	0	0.000	0.000	0.000	0	
3	Expected	5,310	0.405	40.512	35.744	4,000	OK
	Measured	5,310	0.405	40.512	35.744	4,000	
	Difference	0	0.000	0.000	0.000	0	
4	Expected	7,310	0.558	55.771	50.764	4,000	OK
	Measured	7,310	0.558	55.771	50.764	4,000	
	Difference	0	0.000	0.000	0.000	0	
5	Expected	9,310	0.710	71.030	65.963	4,000	OK
	Measured	9,310	0.710	71.030	65.963	4,000	
	Difference	0	0.000	0.000	0.000	0	
6	Expected	11,310	0.863	86.288	81.207	4,000	OK
	Measured	11,310	0.863	86.288	81.207	4,000	
	Difference	0	0.000	0.000	0.000	0	
7	Expected	13,310	1.015	101.547	96.462	4,000	OK
	Measured	13,310	1.015	101.547	96.462	4,000	
	Difference	0	0.000	0.000	0.000	0	

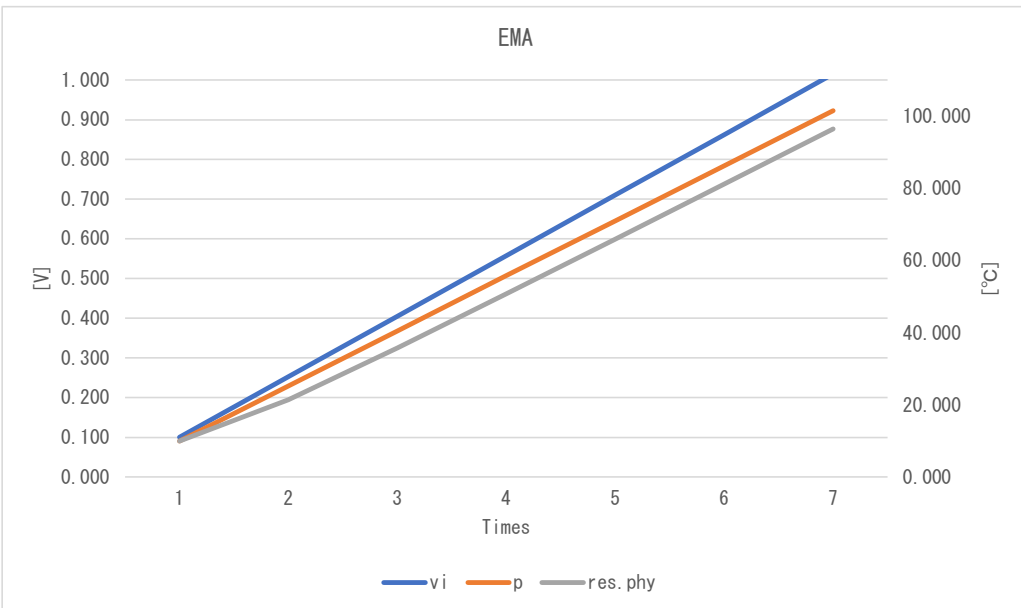

WMA

No.		Dummy ai	vi	p	res. phy	res. sts	Judgment
1	Expected	1,310	0.100	9.995	9.995	4,000	OK
	Measured	1,310	0.100	9.995	9.995	4,000	
	Difference	0	0.000	0.000	0.000	0	
2	Expected	3,310	0.253	25.253	17.624	4,000	OK
	Measured	3,310	0.253	25.253	17.624	4,000	
	Difference	0	0.000	0.000	0.000	0	
3	Expected	5,310	0.405	40.512	30.340	4,000	OK
	Measured	5,310	0.405	40.512	30.340	4,000	
	Difference	0	0.000	0.000	0.000	0	
4	Expected	7,310	0.558	55.771	45.598	4,000	OK
	Measured	7,310	0.558	55.771	45.598	4,000	
	Difference	0	0.000	0.000	0.000	0	
5	Expected	9,310	0.710	71.030	60.857	4,000	OK
	Measured	9,310	0.710	71.030	60.857	4,000	
	Difference	0	0.000	0.000	0.000	0	
6	Expected	11,310	0.863	86.288	76.116	4,000	OK
	Measured	11,310	0.863	86.288	76.116	4,000	
	Difference	0	0.000	0.000	0.000	0	
7	Expected	13,310	1.015	101.547	91.375	4,000	OK
	Measured	13,310	1.015	101.547	91.375	4,000	
	Difference	0	0.000	0.000	0.000	0	

